


KSHT-H116

Fiber Optic Splice Closure

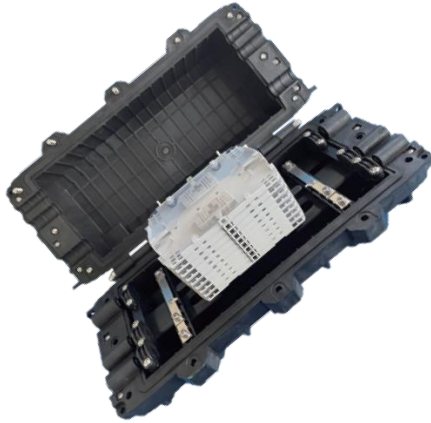

Features:

- May be used for cut, uncut and taut sheath applications
- May be used for all fiber optic cable
- Sheath retention & central strength member fasten system included
- Ribbed closure construction and lightweight plastic provides strength and resistance to chemical and U.V attack
- Installation and reentry with a minimum of tools
- All hardware are included
- Re-enterable and reusable
- RoHS compliance

Application:

Wall mounting, Duct mounting, Aerial mounting

Specifications:

Model No	Size (mm) L x W x H	Fiber capacity	Splice capacity of the tray	Cable ports
KSHT-H116	493 x 238 x 167	216 splices (9x24 splices)	Each tray up to 24 cores	6 ports: 2 ports for 1 cable with max 23mm 2 ports for 1 cable with max 20mm 2 ports for 1 cable with max 16mm

Ordering code:

KSHT-H116

-	X	-	X
	# of Trays		# of Fibers
	1 - 9		1 - 216



Accessories:

- Standard Components: Cover, Bottom, Seal gasket, Clamp, Splice Tray (with heat shrink sleeves), Nylon tie, Cable fixing device, Grounding wire, Labeling paper, Buffer tube, Insulation tape
- Optional Accessories: Aerial mounting kits, Duct mounting kits, Pressure valve, Grounding device

