

CS-12G-SDI

SDI Mini Converter Optical Fiber 12G

Description:

Mini Converter Optical Fiber 12G converts SDI to optical fiber and optical fiber to SDI in both directions at the same time, you can even have different video standards going in each direction! The **12G-SDI** connections are multi rate, which makes it compatible with all SD, HD and Ultra HD formats and equipment up to 2160p60, including Level A and B devices. You can install any standard 3G, 6G or **12G-SDI** SFP optical fiber module so you can send SDI using the same low cost optical fiber cables that are commonly used for computer networks.



Connections:

SDI Video Inputs

1 x SD, HD and 12G-SDI Video and 1 x Optical Fiber Input.

SDI Video Outputs

Automatically matches the SD, HD and 12G-SDI video input on the Optical Fiber.

Optical Fiber Connection (optional)

1 x SMPTE optical fiber SFP socket.

Optical fiber SFP module sold separately.

Optical Fiber Video Inputs

1 x 10 bit SD/HD/12G-SDI switchable.

Optical Fiber Video Outputs Automatically matches the SD, HD and 12G-SDI video input.

Optical Fiber Audio Inputs

16 channel embedded.

Optical Fiber Audio Outputs


16 channel embedded.

Multi Rate Support

Auto detection of SD, HD or 12G-SDI.

Reclocking

Yes

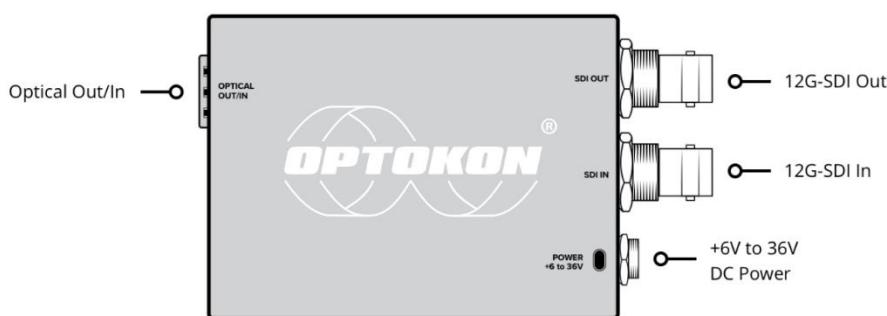

Standards:

SD Video Standards: 525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94, 720p60,
1080p23.98, 1080p24,
1080p25, 1080p29.97,
1080p30, 1080p50,
1080p59.94, 1080p60,
1080PsF23.98, 1080PsF24,
1080PsF25, 1080PsF29.97,
1080PsF30, 1080i50,
1080i59.94, 1080i60

2K Video Standards

2K DCI 23.98p, 2K DCI 24p, 2K
DCI 25p, 2K DCI 23.98PsF, 2K
DCI 24PsF, 2K DCI 25PsF

Ultra HD Video Standards

2160p23.98, 2160p24,
2160p25, 2160p29.97,
2160p30, 2160p50,
2160p59.94, 2160p60

4K Video Standards

4K DCI 23.98p, 4K DCI 24p, 4K
DCI 25p

SDI Compliance

SMPTE 259M, SMPTE 292M,
SMPTE 296M, SMPTE 424M,
SMPTE 425M, SMPTE, SMPTE
ST-2081, ITU-R BT.656, ITU-R
BT.601 and SMPTE 297M for
Optical Fiber SDI.

SDI Video Rates

SDI video inputs are
automatically detected between
standard definition, high
definition, level A or level B
3G-SDI, 6G-SDI and 12G-SDI.

SDI Video Sampling

4:2:2 and 4:4:4

SDI Audio Sampling

Television standard sample rate
of 48 kHz and 24-bit.

SDI Color Precision

4:2:2 and 4:4:4

SDI Color Space

YUV and RGB

SDI Auto Switching


Automatically detects SD, HD or
12GSDI.

ASI Support

Yes

Power:

- Power Supply +12V universal power supply included with international socket adapters for most countries. Cable tie point.
- Power Consumption 2 Watts
- Operational Voltage Range 6 - 36V DC

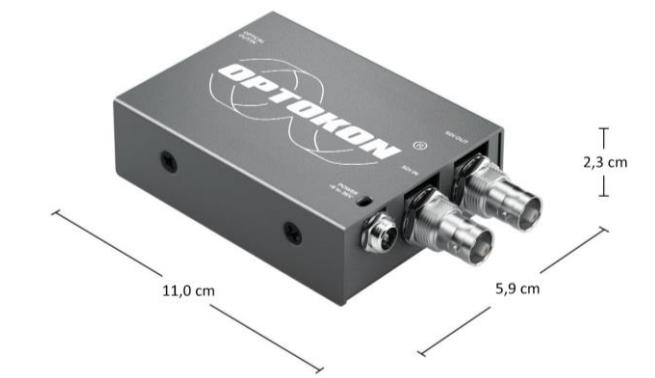Specification:
Dimensions

SFP optical port


Operating temperature
Storage temperature
Relative Humidity

0° to 40° C (32° to 104° F)
-20° to 45° C (-4° to 113° F)
0% to 90% non-condensing