


KNS-12 Splice trays

Description:

The splice trays are designed for installation into the OPTOKON system of optical rack mount distribution frames and wall mount optical boxes. The splice trays are equipped with fixed internal fiber bend radius protectors, which allow storage and organization of spare fiber, both primary 250 μm and 900 μm coating. The KNS-SH-D splice holders can be used in the splice cassettes, designed for standard heat shrinkable protection sleeves. The capacity depending on outer diameter of protection sleeves after heating is 6 to 12 splices. The KNS-12S stackable series allows installation hinges at the sides of the cassette, which are designed for opening the block of cassettes and enabling easy access to the spliced fibers during fiber optic systems operation. The lid - optional accessories for each cassette type can be used to cover a single or block of cassettes.

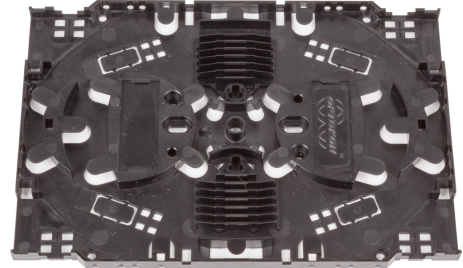

Specifications:

KNS-12S


Stackable splice cassette, removable and changeable splice holders

storage capacity: 12, up to 24 fibers

dimensions: 170 x 116 x 8 mm

standard: splice holder KNS-SH-D
(2 pc, heat-shrink)
cable tie (4 pcs)

options: lid KNS-12S-L, hinge, fiber guide, splice holder

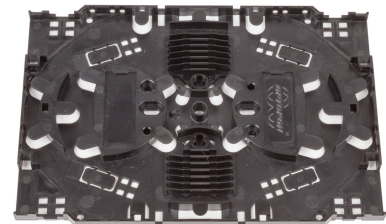

KNS-12M



Mini splice cassette, removable and changeable splice holders

storage capacity: 12 fibers


dimensions: 155 x 91 x 8 mm

standard: splice holder KNS-SH-D
(2 pcs, heat-shrink)
cable tie (4 pcs)

options: lid KNS-12M-L, splice holder

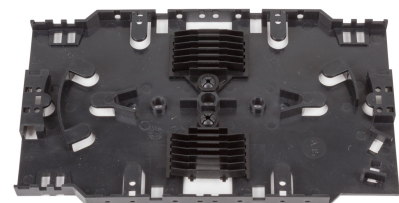

KNS-HI application




KNS-FG application

**Accessories:
Splice holder**




KNS-SH-D

6- 12 fibers capacity¹



KNS-12S-L lid for KNS-12S splice cassette
KNS-12M-L lid for KNS-M splice cassette

Fiber guide



KNS-FG

Hinge



KNS-HI

Note: 1) depends on outer diameter of protection sleeve after heating

Ordering code:

**KNS-12S
KNS-12M**