

## MCPE-02F End user terminating box

### Description:

End user terminating box




### Features:

- Ergonomical compact design
- Ability to allow cables to enter from rear or bottom of the unit
- Removable cover for easy access
- Indoor use for wall mount unit used for small and large business premises
- Easily re-enter with a minimum of tools, saves time and cost
- Up to 4 cores (heat shrink protective sleeve ) or 2 cores (mechanical splices)
- Can hold 2 SC simplex adaptor or 2 LC duplex adaptor
- Can be used for Blown Tube cable or common cables
- Three cable ports, each port for one cable with maximum diameter Ø 10 mm
- RoHS compliance

### Specifications:

Model no.	MCPE-02F
Cable port	3 cable ports, each port for 1 cable with max Ø 10 mm
Can be used for uncut cable (loop cable)	YES
Spliced fiber storage capacity	4 cores (heat shrink protective sleeve) or 2 cores (mechanical splices)
Adaptor Capacity	2 SC adaptors or 2 LC duplex (DLC)
Dimensions	108.5 x 85 x 27 mm

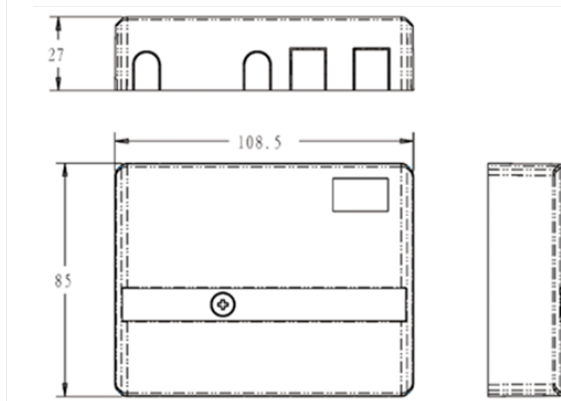

**Ordering code:**

**MCPE-02F - XXX X**

**- X**

Coupling type			
<b>SC</b>	SC	<b>M</b>	Multimode
<b>DLC</b>	Duplex LC	<b>S</b>	Singlemode
<b>NC</b>	No Connectors	<b>A</b>	APC

Number of adapters
<b>1 - 2</b>