


## Outdoor Multi-tube Micro Cable 216F (CC)

### Description:

#### Outdoor Multi-tube Micro Cable 216F (CC)

**Rev. 0050-19/50**

Cable for external installation by air-blowing technique.

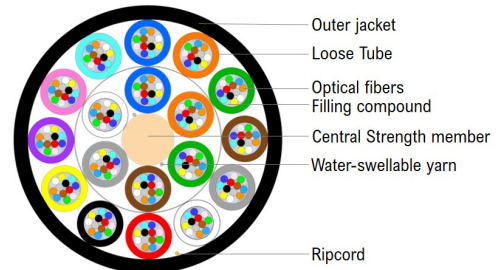

### Specifications:

Fiber count	216
Fiber Type	G.652.D, G.657.A1, G.657.A2, OM1, OM2, OM3, OM4
Fiber color	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Aqua
Tube	Gel-Filled PBT buffer tube
Tube color - inner layer	Blue, Orange, Green, Brown, Grey, White
Tube color - outer layer	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Aqua
Tube filling compound	Thixotropic Jelly Compound
Central strength member	FRP rod
Ripcord	1x under outer jacket
Outer jacket	UV resistant black HDPE
Outer jacket thickness	0.5 mm

Cable outer diameter	8.7	[mm]
Tube count	18 (6+12)	
Filler count	0	
Max. Loading (Short Term)	900	[N]
Max. Loading (Long Term)	200	[N]
Max. compressive loading	700	[N]
Max. Impact loading	3	[Nm]
Min. bend radius not load	15	[OD]
Min. bend radius load	20	[OD]
Operating temperature range	-30 to +70	[°C]

*Specifications are to change without notice. The information in this document must not be copied or reproduced without the prior written permission of the OPTOKON Kable Co., Ltd., s.r.o.*

Storage temperature range	-40 to +70	[°C]
Installation temperature range	-15 to +50	[°C]
Cable Weight (calc.)	67	[kg/km]
Class of fire reaction	F <sub>ca</sub>	
Test standards: EN 60793-1, EN 60794-1-21, EN 60794-1-22, EN 13501-6		

**Ordering code:**

**OPK-O-MTFDM-216(18x1,5)LTP-xx-BK**

xx - fiber type (see Cable code datasheet)

**Marking Method:** Ink-Jet

**Print legend:** OPK -cable type - lot number- length marking per 1 m (customer print legend available on request)

**Delivery length:** 2100 m, 4200 m, 6300 m ±5% on plywood reel or solid wooden non-returnable drum