


Outdoor Multi-tube Micro Cable 96F (RD)

Description:

Outdoor Multi-tube Micro Cable 96F (RD)

Rev. 0053-21/30

Reduced diameter cable for external installation by air-blowing technique.

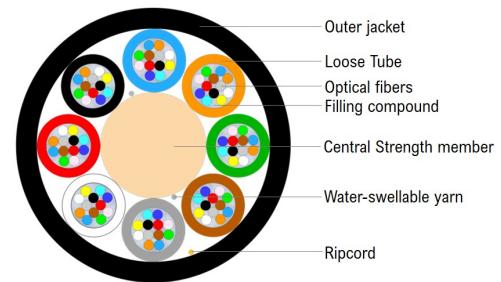

Specifications:

Fiber count	96
Fiber Type	G.657.A1 200 μm
Fiber color	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Aqua
Tube	Gel-Filled PBT buffer tube
Tube color	Blue, Orange, Green, Brown, Grey, White
Tube filling compound	Low-viscosity filling compound
Central strength member	FRP rod
Ripcord	1x under outer jacket
Outer jacket	UV resistant black HDPE
Outer jacket thickness	0.4 mm

Cable outer diameter	5.4	[mm]	
Tube count	8		
Filler count	0		
Max. Tensile Loading (Short Term)	1000	[N]	EN 60794-1-21-E1
Max. Tensile Loading (Long Term)	270	[N]	EN 60794-1-21-E1
Max. compressive loading	200	[N/10cm]	EN 60794-1-21-E3
Max. Impact loading	3	[Nm]	EN 60794-1-21-E4
Min. bend radius not load	15	[OD]	EN 60794-1-21-E11
Min. bend radius load	20	[OD]	EN 60794-1-21-E11

Operating temperature range	-30 to +70	[°C]	EN 60794-1-22-F1
Storage temperature range	-30 to +70	[°C]	EN 60794-1-22-F1
Installation temperature range	-10 to 40	[°C]	EN 60794-1-22-F1
Water tightness	No water detected on free end		EN 60794-1-22-F5
Cable Weight (calc.)	28	[kg/km]	
Class of fire reaction	Fca		EN 13501-6

Ordering code:

OPK-O-MTFDM-96(8x1.2)LTP-200A1-BK

Marking Method: Ink-Jet

Print legend: OPK -cable type - lot number- length marking per 1 m (customer print legend available on request)

Delivery length: 2100 m, 4200 m, 6300 m, 8400 m, $\pm 5\%$ on plywood reel or solid wooden non-returnable drum