

## Furcation Tubing

### Description:

#### Furcation Tubing


Rev. 0204-20/46

Furcation Tubing adds protection where they are used 250 µm fibres.




Furcation Tubing

### Specifications:



Furcation Tubing

Secondary coating material	FR-LSHF Thermoplastic
Tubing colour	Natural
Cable outer diameter	0.9 mm
Delivery length	2000 m ± 5%
Packaging	Plastic reel 260 mm
Cable weight	0.9 kg/km
Class of fire reaction	Fca
Cable Code (Ordering Code)	Furcation Tubing 0.9NT
Printing	No




Outer jacket

Furcation Tubing

Strength members

Secondary coating material	FR-LSHF Thermoplastic
Tubing colour	Blue
Strength members	Aramid yarns
Outer jacket	Thermoplastic FR-LSHF compound
Cable outer diameter	2.0 mm
Max. Loading	100 N
Max. compressive loading	100 N (with fibre)
Min. bend radius	10× OD (with fibre)
Delivery length	2000 m ± 5%
Packaging	Plywood reel
Cable weight	3.7 kg/km
Class of fire reaction	Fca
Cable Code (Ordering Code)	OPK-I-SFT-0(1×2,0)FCAH-0-xx
Printing	Yes*

xx – Jacket colour

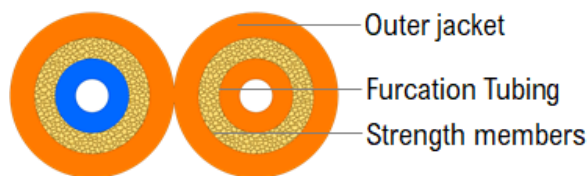

Secondary coating material	FR-LSHF Thermoplastic
Tubing colour	Blue, Orange
Strength members	Aramid yarns
Outer jacket	Thermoplastic FR-LSHF compound
Cable outer diameter	2.0×4.2 mm
Max. Loading	150 N
Max. compressive loading	100 N (with fibre)
Min. bend radius	10× OD (with fibre, along a longer axis)
Delivery length	2000 m ± 5%
Packaging	Plywood reel
Cable weight	7.9 kg/km
Class of fire reaction	Fca
Cable Code (Ordering Code)	OPK-I-DFT-0(2×2,0)FCAH-0-xx
Printing	Yes*
xx - Jacket colour	

## Ordering code:

**Furcation Tubing 0.9NT**  
**OPK-I-SFT-0(1×2,0)FCAH-0-xx**  
**OPK-I-DFT-0(2×2,0)FCAH-0-xx**

\*Marking Method: Ink-Jet, Print legend: OPK -cable type - lot number- length marking per 1 m  
(customer print legend available on request)