


FTTx Flat Aerial Drop Cable

Description:

FTTx Flat Aerial Drop Cable

Rev. 00206-20/47

Easy-strippable Access Cable for indoor or outdoor aerial installation.

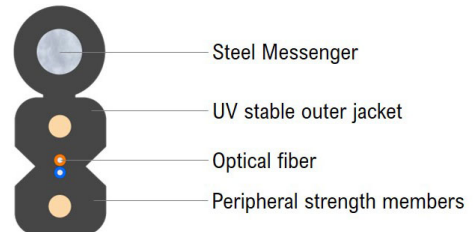

Specifications:

Fiber Type	G.657.A1, G.657.A2
Fiber color	Blue, Orange
Strength member	FRP rods
Messenger	Steel Wire
Outer jacket	Thermoplastic FR-LSHF compound according to BS 7878:7 and DIN VDE 0207, part 24, type HM2
Outer jacket color	Black

Cable outer diameter	2.0×5.0	[mm]
Max. tensile loading	600	[N]
Max. compressive loading	2000	[N]
Max. Impact loading	1	[Nm]
Min. bend radius (without steel wire)	15	[mm]
Operating temperature range	-30 to +60	[°C]
Installation temperature range	-5 to +50	[°C]
Storage temperature range	-30 to +60	[°C]
Cable Weight	17.5	[kg/km]
Class of fire reaction	Fc _a	

Ordering code:

1 Fiber **OPK-U-DRPM-1(1x0,25)FFTZH-xx-BK**

2 Fibers **OPK-U-DRPM-2(2x0,25)FFTZH-xx-BK**

xx - fiber type (see Cable code datasheet)