


Universal Multitube Cable 192F (HC)

Description:

Universal Multitube Cable 192F (HC)

Rev. 0138-20/23

Full dielectric cable for external or internal installation on cable trays or into duct by pulling

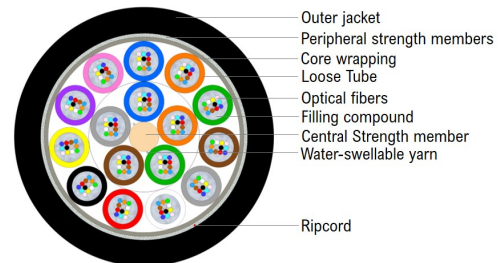

Specifications:

Fiber count	192
Fiber Type	G.652.D, G.657.A1, G.657.A2, G.655, G.656, OM1, OM2, OM2+, OM3, OM4, OM5
Fiber color	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Aqua
Tube	Gel-Filled PBT buffer tube
Tube color - inner layer	Blue, Orange, Green, Brown, Grey
Tube color - outer layer	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink
Tube filling compound	Thixotropic Jelly Compound
Central strength member	FRP rod
Core wrapping	Water-swellaable tape
Peripheral strength members	Water-swellaable glass yarns
Ripcord	1x under outer jacket
Outer jacket	UV resistant Thermoplastic FR-LSHF compound according to BS 7878:7 and DIN VDE 0207, part 24, type HM2
Jacket thickness	2.0 mm

Cable outer diameter	15.8	[mm]
Tube count	16 (5+11)	
Filler count	0	
Max. Loading (Short Term)	3100	[N]
Max. Loading (Long Term)	620	[N]
Max. compressive loading	2000	[N]
Max. Impact loading	20	[Nm]
Min. bend radius not load	15	[OD]

Min. bend radius load	20	[OD]
Operating temperature range	-40 to +70	[°C]
Storage temperature range	-40 to +70	[°C]
Installation temperature range	-15 to +50	[°C]
Cable Weight (calc.)	231	[kg/km]
Class of fire reaction	F _{ca}	
Test standards: EN 60790-1, EN 60794-1-21, EN 60794-1-22, EN 13501-6		

Ordering code:

OPK-U-MTFDS-192(16x2.3)LTGH-xx-yy

xx - fiber type, yy - jacket colour (see Cable code datasheet)

Marking Method: Ink-Jet

Print legend: OPK -cable type - lot number- length marking per 1 m (customer print legend available on request)

Delivery length: 2000 m ±5% on plywood reel or solid wooden non-returnable drum