


FTTA Cable

Description:

FTTA Cable

Rev. 0212-21/06

Cable for vertical cabling in FTTA applications.

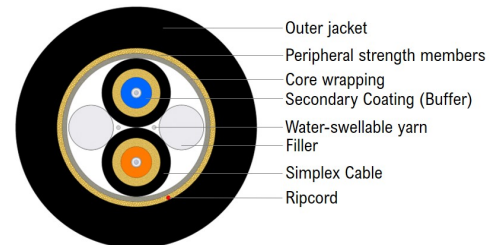

Specifications:

Fibre count	2
Fibre Type	G.657.A1, G.657.A2, OM1, OM2, OM3, OM4
Fibre colour	Natural
Buffer diameter	0.9 mm
Buffer material	UV curable acrylate
Buffer colour	Blue, Orange
Simplex Colour	Black (identified by numbers #1 a #2)
Simplex jacket	Thermoplastic FR-LSHF compound according to BS 7878:7 and DIN VDE 0207, part 24, type HM2
Simplex diameter	2.0 mm
Core wrapping	Water-swellable tape
Strength members	Water-swellable Aramid yarns
Ripcord	1x under outer jacket
Outer jacket	Thermoplastic FR-LSHF compound according to BS 7878:7 and DIN VDE 0207, part 24, type HM2
Outer jacket thickness	1.2 mm
Outer jacket colour	Black

Cable outer diameter	7.0	[mm]	
Maximum tensile loading (Short Term)	800	[N]	EN 60794-1-21-E1
Maximum tensile loading (Long Term)	300	[N]	EN 60794-1-21-E1
Max. compressive loading	1500	[N]	EN 60794-1-21-E3
Max. Impact loading	5	[Nm]	EN 60794-1-21-E4
Min. bend radius (not load)	10	[OD]	EN 60794-1-21-E11
Operating temperature range	-40 to +70	[°C]	EN 60794-1-22-F1
Storage temperature range	-40 to +70	[°C]	EN 60794-1-22-F1
Installation temperature range	-5 to +50	[°C]	EN 60794-1-22-F1

Specifications are to change without notice. The information in this document must not be copied or reproduced without the prior written permission of the OPTOKON Kable Co., Ltd., s.r.o.

Cable Weight (calc.)	48	[kg/km]	
Water tightness	No water detected on free end		EN 60794-1-22-F5
Class of fire reaction	Fca		EN 13501-6

Ordering code:

OPK-U-FTAS-2(2x2,0)A9AHH-xx-BK

xx - fiber type (see Cable code datasheet)

Marking Method: Ink-Jet

Print legend: OPK -cable type - lot number- length marking per 1 m (customer print legend available on request)

Delivery length: 2100 m \pm 5% on plywood reel or solid wooden non-returnable drum