


Flexible Breakout Cable 4F

Description:

Flexible Breakout Cable 4F

Rev. 0215-21/08

Universal Cable for backbone cabling in indoor and outdoor applications with improved flexibility.

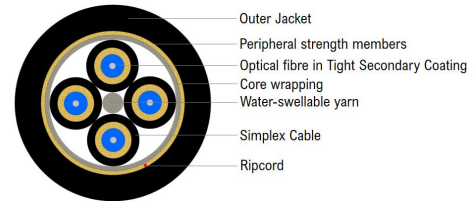

Specifications:

Fiber Type	G.657.A1, G.657.A2, OM1, OM2, OM2+, OM3, OM4, OM5
Fiber colour	Natural
Buffer material	Thermoplastic FR-LSHF compound
Buffer diameter	0.9 mm
Simplex jacket material	Thermoplastic FR-LSHF compound according to BS 7878:7 and DIN VDE 0207, part 24, type HM2
Simplex Diameter	2.0 mm
Simplex jacket colour	Identical to the outer jacket
Filler	Thermoplastic FR-LSHF compound according to BS 7878:7 and DIN VDE 0207, part 24, type HM2
Core wrapping	Water-swellable tape
Peripheral strength members	Water-swellable Aramid yarns
Ripcord	1x under outer jacket
Outer jacket	UV Resistant Flame-retardant (V-2, UL94) Thermoplastic Polyurethane resistant to micro-organisms and hydrolysis, flexible during very low temperature
Outer Jacket thickness	1.0 mm
Outer jacket colour	Black (RAL9005), Olive Green (RAL6003), Beige (RAL1001), Yellow (RAL1021), White (RAL9010)

Cable outer diameter	7.5	[mm]	
Max. Loading (Short Term)	500	[N]	EN 60794-1-21-E1
Max. Loading (Long Term)	180	[N]	EN 60794-1-21-E1
Max. compressive loading	500	[N]	EN 60794-1-21-E3
Max. Impact loading	5	[Nm]	EN 60794-1-21-E4
Min. bend radius (not load)	10	[OD]	EN 60794-1-21-E11
Operating temperature range	-30 to +60	[°C]	EN 60794-1-22-F1
Storage temperature range	-30 to +60	[°C]	EN 60794-1-22-F1
Installation temperature range	-15 to +50	[°C]	EN 60794-1-22-F1
Water tightness	No water detected on free end	EN 60794-1-22-F5	
Cable Weight (calc.)	46	[kg/km]	
Class of fire reaction	Fca		EN 13501-6

Specifications are to change without notice. The information in this document must not be copied or reproduced without the prior written permission of the OPTOKON Kable Co., Ltd., s.r.o.

Ordering code:

OPK-U-BRFS-4(4x2.0)T9AHAU-xx-yy

xx - fiber type, yy - cable jacket colour (see Cable code datasheet)

Marking Method: Ink-Jet

Print legend: OPK -cable type - lot number- length marking per 1 m (customer print legend available on request)

Delivery length: 2000 m \pm 5% on plywood reel