


Air Blown Unit 2.4

Description:

Air Blown Unit 2.4

Rev. 0258-22/13

Lightweight cable with a hard and smooth surface, suitable for installation by blowing technique.

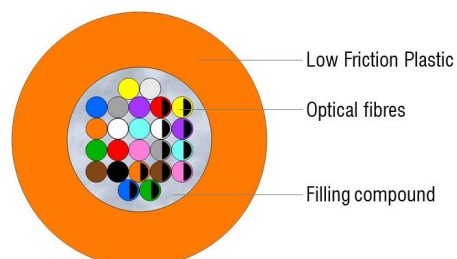

Specifications:

Fiber count	24
Fiber Type	G.657.A1 200 µm
Fiber colour	1-12 Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Aqua 13-24 BlueBS, OrangeBS, GreenBS, BrownBS, GreyBS, WhiteBS, RedBS, Natural, YellowBS, VioletBS, PinkBS, AquaBS (BS = Black strip)
Filling compound	Low-viscosity filling compound
Cable colour	Orange

Cable outer diameter	2.4±0.1	[mm]	
Max. Tensile Loading (Short Term)	45	[N]	EN 60794-1-21-E1
Max. Tensile Loading (Long Term)	10	[N]	EN 60794-1-21-E1
Max. compressive loading	100	[N/10cm]	EN 60794-1-21-E3
Min. bend radius	30	[mm]	EN 60794-1-21-E11
Operating temperature range	-20 to +70	[°C]	EN 60794-1-22-F1
Storage temperature range	-20 to +70	[°C]	EN 60794-1-22-F1
Installation temperature range	+5 to +50	[°C]	EN 60794-1-22-F1
Water tightness	No water detected on free end		EN 60794-1-22-F5
Cable Weight (calc.)	5.8	[kg/km]	
Class of fire reaction	Fca		EN 13501-6

Ordering code:

Fiber count	Cable Code (Ordering Code)
24	OPK-O-CTFB-24(1x2.4)LTB-200A1-OG

Print legend: OPK -cable type - lot number- length marking per 1 m (customer print legend available on request)

Delivery length: 2100 m $\pm 5\%$ on plywood reel