


Outdoor Multitube Cable-Lite 72F (NC)

Description:

Outdoor Multitube Cable-Lite 72F (NC)

Rev. 0264-22/34

Full dielectric cable for external installation on cable trays or into duct

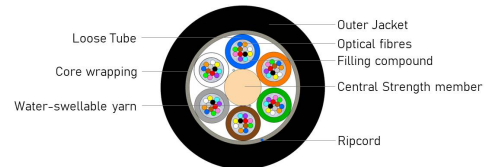

Specifications:

Fiber count	72
Fiber Type	G.652.D, G.657.A1, G.657.A2, G.655, G.656, OM1, OM2, OM2+, OM3, OM4
Fiber color	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Aqua
Tube	Gel-Filled PBT buffer tube
Tube color	Blue, Orange, Green, Brown, Grey, White
Tube filling compound	Low-viscosity filling gel
Central strength member	FRP rod
Core wrapping	Water-swellable tape
Ripcord	1x under outer jacket
Outer jacket	UV resistant black HDPE
Jacket thickness	1.2 mm

Cable outer diameter	8.0	[mm]	
Tube count		6	
Filler count		0	
Max. Tensile Loading (Short Term)	950	[N]	EN 60794-1-21-E1
Max. Tensile Loading (Long Term)	300	[N]	EN 60794-1-21-E1
Max. compressive loading	1500	[N/10cm]	EN 60794-1-21-E3
Max. Impact loading	7	[Nm]	EN 60794-1-21-E4
Min. bend radius (no load)	15	[OD]	EN 60794-1-21-E11
Min. bend radius (maximum load)	20	[OD]	EN 60794-1-21-E11
Operating temperature range	-40 to +70	[°C]	EN 60794-1-22-F1
Storage temperature range	-40 to +70	[°C]	EN 60794-1-22-F1
Installation temperature range	-15 to +50	[°C]	EN 60794-1-22-F1

Specifications are to change without notice. The information in this document must not be copied or reproduced without the prior written permission of the OPTOKON Kable Co., Ltd., s.r.o.

Water tightness	No water detected on free end		EN 60794-1-22-F5
Cable Weight (calc.)	50	[kg/km]	
Class of fire reaction	Fca		EN 13501-6

Ordering code:

OPK-O-MTFDS-72(6x1.7)LTP-xx-BK

xx - fiber type (see Cable code datasheet)

Marking Manufacturer - year of manufacture - cable type - batch number - length marking
(customer print legend available on request)

Marking Method Hot-foil or Ink-Jet

Delivery length 2100 m, 4200 m \pm 5% on plywood reel or solid wooden non-returnable drum