


Outdoor Multitube Cable 144F (SC)

Description:

Outdoor Multitube Cable 144F (SC)

Rev. 0121-21/05

Full dielectric cable for external installation on cable trays or into duct by pulling

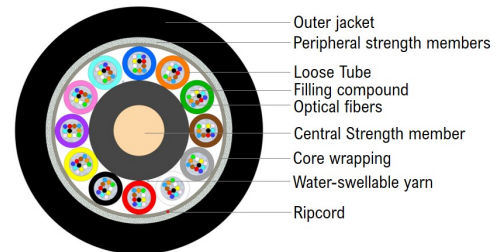

Specifications:

Fiber count	144
Fiber Type	G.652.D, G.657.A1, G.657.A2, G.655, G.656, OM1, OM2, OM2+, OM3, OM4
Fiber color	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Aqua
Tube	Gel-Filled PBT buffer tube
Tube color	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Aqua
Tube filling compound	Thixotropic Jelly Compound
Central strength member	PE coated FRP rod
Core wrapping	Water-swellaable tape
Peripheral strength members	Water-swellaable glass yarns
Ripcord	1x under outer jacket
Outer jacket	UV resistant black HDPE
Jacket thickness	1.5 mm

Cable outer diameter	14.0	[mm]	
Tube count		12	
Filler count		0	
Maximum tensile loading (Short Term)	3400	[N]	EN 60794-1-21-E1
Maximum tensile loading (Long Term)	2100	[N]	EN 60794-1-21-E1
Max. compressive loading	2000	[N/10cm]	EN 60794-1-21-E3
Max. Impact loading	20	[Nm]	EN 60794-1-21-E4
Min. bend radius (not load)	15	[OD]	EN 60794-1-21-E11
Operating temperature range	-40 to +70	[°C]	EN 60794-1-22-F1
Storage temperature range	-40 to +70	[°C]	EN 60794-1-22-F1

Installation temperature range	-15 to +50	[°C]	EN 60794-1-22-F1
Water tightness	No water detected on free end		EN 60794-1-22-F5
Cable Weight (calc.)	132	[kg/km]	
Class of fire reaction	Fca		EN 13501-6

Ordering code:

OPK-O-MTFDS-144(12x2.0)LTGP-xx-BK

xx - fiber type (see Cable code datasheet)

Marking Method: Ink-Jet

Print legend: OPK -cable type - lot number- length marking per 1 m (customer print legend available on request)

Delivery length: 2100 m ±5% on plywood reel or solid wooden non-returnable drum